


DYNA FLEX

SAE 100R18

1811 (BLACK)

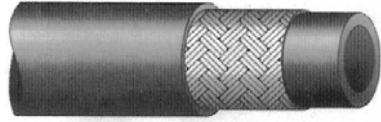

Recommended For: Medium pressure lift truck for over the sheave (pulley) type system.

Inner Core: Oil resistant synthetic polyester tube

Reinforcement: Braided high tensile synthetic fiber

Cover: Black high abrasion resistant polyurethane

Temperature Range: -40 degrees F. to +212 degrees F.
(-40 degrees C. to +100 degrees C.)

Hose Part No.	Nominal I.D.		Nominal O.D.		Maximum Oper. Press.		Minimum Burst Press.		Min. Bend Radius (In.)	Wt. Per 100 Ft. (Lbs.)
	In.	mm.	In.	mm.	PSI	Mpa	PSI	Mpa		
1811-04	1/4	6.35	.50	12.83	3,000	21	12,000	84	1-1/2	7.3
1811-05	5/16	7.94	.61	15.49	3,000	21	12,000	84	1-3/4	10.1
1811-06	3/8	9.53	.66	16.76	3,000	21	12,000	84	2-1/2	13.0
1811-08	1/2	12.70	.88	22.35	3,000	21	12,000	84	3-1/2	19.7

DYNA FLEX, INC.
7300 INDUSTRIAL PARK BLVD.
MENTOR, OHIO 44060 U.S.A.

PHONE: (440) 946-0719 TOLL FREE: (800) 525-8463 FAX: (440) 946-4620
Web Site: www.dynaflexinc.com E-Mail: sales@flexinc.com Rev E, Nov. 6, 2013