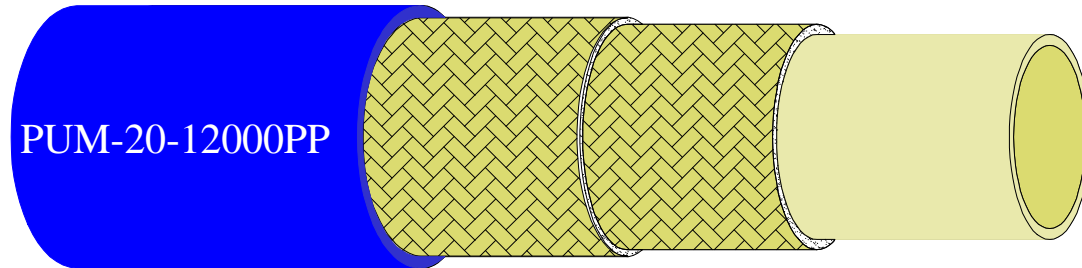


DYNA FLEX**3,000 PSI HYDRAULIC (UMBILICAL)**

Blue Cover

**Innercore:** Neutral seamless polyester tube**Reinforcement:** Two braids of high tensile aramid fiber**Cover:** Blue, polyester, pin pricked**Temperature Range:** -40 degrees F. to +212 degrees F.
(-40 degrees C. to +100 degrees C.)

| Hose Part No. | Nominal I.D. | | Nominal O.D. | | Max. Oper. | | Min. Burst Press. | | Bend Radius | | Wt. Lbs/Ft. |
|----------------|--------------|------|--------------|-------|------------|-----|-------------------|-----|-------------|-------|----------------|
| | Inches | MM | Inches | MM | PSI | Bar | PSI | Bar | Inches | MM | |
| PUM-20-12000PP | 1-1/4 | 31.8 | 1.72 | 43.70 | 3,000 | 207 | 12,000 | 828 | 20 | 508.0 | 0.51 |

DYNA FLEX, INC.
7300 INDUSTRIAL PARK BLVD.
MENTOR, OHIO 44060 U.S.A.

PHONE: (440) 946-0719 TOLL FREE: (800) 525-8463 FAX: (440) 946-4620
Web Site: www.dynaflexinc.com E-Mail: sales@flexinc.com Rev B, April 23, 2013